

# **H.264 Megapixel IP Camera** (with DC 12V / PoE / AC24V)


**TCM-5300 series**

**Ver. 091021**

## **Hardware User's Manual**



[www.acti.com](http://www.acti.com)



# PRECAUTIONS

## 1. Read these instructions

You should read all the safety and operating instructions before using this product.

## 2. Heed all warnings

You must adhere to all the warnings on the product and in the instruction manual.



This symbol highlights several areas of concern. Please read descriptions next to each symbol carefully.

- a. Failure to follow the safety instruction given may directly endanger people, cause damage to the system or to other equipment.
- b. The requirements to make this device work, including hardware, computer settings, network settings, and operation procedures.
- c. The tips to make using this device easier, more convenient and more efficient.

## 3. Servicing

Do not attempt to service this video device yourself as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.

## Trademarks

All names used in this manual for hardware and software are probably registered trademarks of respective companies.

## Liability

Every care has been taken during the writing of this manual. Please inform your local office if you find any inaccuracies or omissions. We cannot be held responsible for any typographical or technical errors and reserve the right to make changes to the product and manuals without prior notice.

## FCC/CE Regulation

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the

equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

# Table of Contents

<b>0</b>	<b><i>PRECAUTIONS</i></b>	<b><i>0-1</i></b>
	Trademarks	0-1
	Liability	0-1
	FCC/CE Regulation	0-1
<b>1</b>	<b><i>INTRODUCTION</i></b>	<b><i>1-1</i></b>
<b>1.1</b>	<b>Package Contents</b>	<b>1-1</b>
<b>1.2</b>	<b>Features and Benefits</b>	<b>1-2</b>
<b>1.3</b>	<b>Safety Instructions</b>	<b>1-4</b>
<b>1.4</b>	<b>Physical Description</b>	<b>1-6</b>
<b>1.5</b>	<b>Basic Connections</b>	<b>1-9</b>
<b>1.6</b>	<b>Installation Procedure</b>	<b>1-10</b>
<b>1.7</b>	<b>Product Specification</b>	<b>1-10</b>

# 1

## INTRODUCTION

### 1.1 Package Contents

TCM-5300 Series  
(DC12V / PoE / AC24V)



Power Adaptor (Optional)



Product CD



Terminal Blocks for Power & DI/O



Warranty Card



Accessory



## 1.2 Features and Benefits

This IP device is a cutting-edge digital video transmission device. It can compress and transmit real time images with outstanding images quality (SXGA, 1280x960) at reasonable bandwidth through a standard TCP/IP network. That is because it is Ethernet ready and has the powerful ARM9 SoC with excellent system performance to offer dual streams of H.264/MPEG4/MJPEG, and all three formats offer megapixel resolution. In addition, with these powerful hardware platform, excellent SDK support and powerful respective apparatuses (e.g. the transcoder), this IP device is your best choice building up either conventional IP surveillance system or intelligent IP surveillance system.

### **H.264/MPEG-4/MJPEG Dual Streaming**

With excellent system performance, H.264/MPEG-4/MJPEG are supported. It brings superior image quality at 30 frame per second up to 1280 x 720 resolution, but also offers up to 15 frames per second in SXGA (1280x960).

### **Digital Time Code Embedded**

The “Digital Time Code Embedded” function is to embed the recording time in the H.264/MPEG bit stream. Therefore, each image frame has its respective time when it was recorded. It is very useful when users want to find the video at an exact time or between a certain time intervals.

### **DDNS Supported**

This IP device supports DDNS (Dynamic Domain Name Server). Users can set this IP Box Camera at a virtual domain name (such as cam1.Taipei.xxx) that is linked with its dynamic IP via DDNS service. Everyone can use the virtual domain name to view the video from anywhere with internet access

### **Built-in Hardware Motion Detection**

No more external motion sensors are required. Each IP device can be set up to 3 detection areas. By tuning the object size and sensitivity, it is very reliable to fit into your environment. Besides, hardware motion detection delivers better sensitivity and responds faster than software motion detection.

### **Bundled Powerful Surveillance Software**

To extend the capabilities of the IP Box Camera series, a powerful surveillance program is included in the package and is very free to use. Users can easily utilize the existing PC to be a digital video recorder. Schedule recording and manual recording keep every important image recorded in the local hard disk. Reliable and accurate motion detection with instant warning makes you responsive in every condition. Quick and simple search and playback function lets you easily find the images you want.

### **Software Development Kit Support**

This IP Box Camera can be integrated or controlled by user's application program through the Streaming Library or ActiveX control. With its high level programming interface, software developer's time and efforts to is highly reduced.

## 1.3 Safety Instructions

### **Don't use the power supply with other voltages**

This device is likely to be damaged or damage other equipments / personnel, if you use a power supply with different voltage than the one included with this device. All warranty of this product will be voided in the situations above.

### **Don't open the housing of the product**

#### **Cleaning**

Disconnect this video product from the power supply before cleaning.

#### **Attachments**

Do not use attachments not recommended by the video product manufacturer as they may cause hazards.

#### **Water and Moisture**

Do not use this video product near water, for example, near a bathtub, washbowl, kitchen sink, or laundry tub, in a wet basement, or near a swimming pool and the like.

### **Don't use accessories not recommended by the manufacturer**

- **Only install this device and the power supply in a dry place protected from weather**
- **Servicing**

Do not attempt to service this video product yourself as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.

### **Damage Requiring service**

Disconnect this video product from the power supply immediately and refer servicing to qualified service personnel under the following conditions.

1. When the power-supply cord or plug is damaged.
2. If liquid has been spilled, or objects have fallen into the video product.
3. If the video product has been exposed to rain or water directly.
4. If the video product does not operate normally by following the operating Instructions in this manual. Adjust only those controls that are covered by the instruction manual as an improper adjustment .

Other controls may result in damage and will often require extensive work by a qualified technician to restore the video product to its normal operation.

### **Safety Check**

Upon completion of any service or repairs to this video product, ask the service technician to perform safety checks to determine that the video product is in proper operating condition.

# 1.4 Physical Description



**1. DC Iris**

DC Iris Lens Control Port

**2. Ethernet Port**


The IP device connects to the Ethernet via a standard RJ45 connector. Supporting NWAY, this IP device can auto detect the speed of local network segment (10Base-T/100Base-TX Ethernet).

**3. Power Input**

Connect the power adaptor here if your power input is DC12V.



If your power input is AC24V. Please follow the description on the connector to connect to power.



PIN	NAME	DESCRIPTION
1	N	AC Power Input
2	L	
3	GND	

**4. Reset Button**

**Step 1:** Switch off IP device by disconnecting the power cable

**Step 2:** Press and continue to hold the Reset Button. Reconnect the power cable while continuing to hold the reset button.

**Step 3:** Keep holding the reset button depressed around 12 seconds, release the reset button. The unit will start up with factory default settings.

**5. Audio Input / Output**

The IP device supports audio input and output with earphone jack

**6. Digital Input / Output**

Used in applications like motion detection, event triggering, time lapse recording, alarm notifications, etc., the I/O terminal connector provides the interface to:

- 1 transistor output - For connecting external devices such as relays and LEDs. Connected devices can be activated by Output buttons on the Live View page or by an Event Type. The output will show as active (in Event Configuration > Port Status) if the alarm device is activated.
- 1 digital input - An alarm input for connecting devices that can toggle between an open and closed circuit, for example: PIRs, door/window contacts, glass break detectors, etc. When a signal is received, the device state changes and the input becomes active (shown under Event Configuration > Port Status).

**•Auxiliary power and GND**


Pin 1	GND	Ground	Description
Pin 2	Auxiliary DC Power input (not to power this camera)	Electrically connected in parallel with the connector for the power supply, this pin provides an auxiliary connector for mains power to the unit. This pin can also be used to power auxiliary equipment, with a maximum current of 100mA.	Voltage: 12V DC, Max: 1.2W
Pin 3	Digital Input	Connect to GND to activate, or leave floating (or unconnected) to deactivate.	Must not be exposed to voltages greater than 30V DC.
Pin 4	Transistor Output	Uses an open-collector NPN transistor with the emitter connected to the GND pin. If used with an external relay, a diode must be connected in parallel with the load, for protection against transient voltages.	Max load = <100mA Max voltage = 24V DC (to the transistor)

The I/O terminal pins are numbered left to right, as shown below.




Connect input/output devices to the camera as follows:

1. Attach the cables for the device securely to the supplied green connector block.
2. Once the cables are connected, push the connector block into the terminal connector (also green) on the camera.

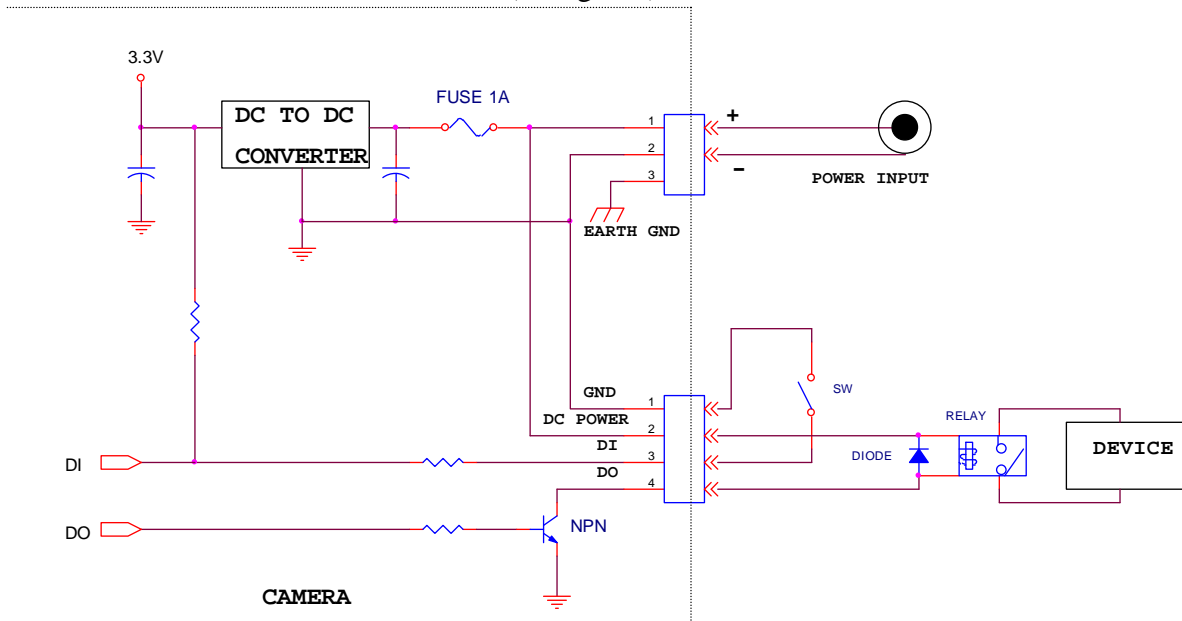

## 1.5 Basic Connections

Follow the procedures below to connect the IP device to the respective apparatuses.

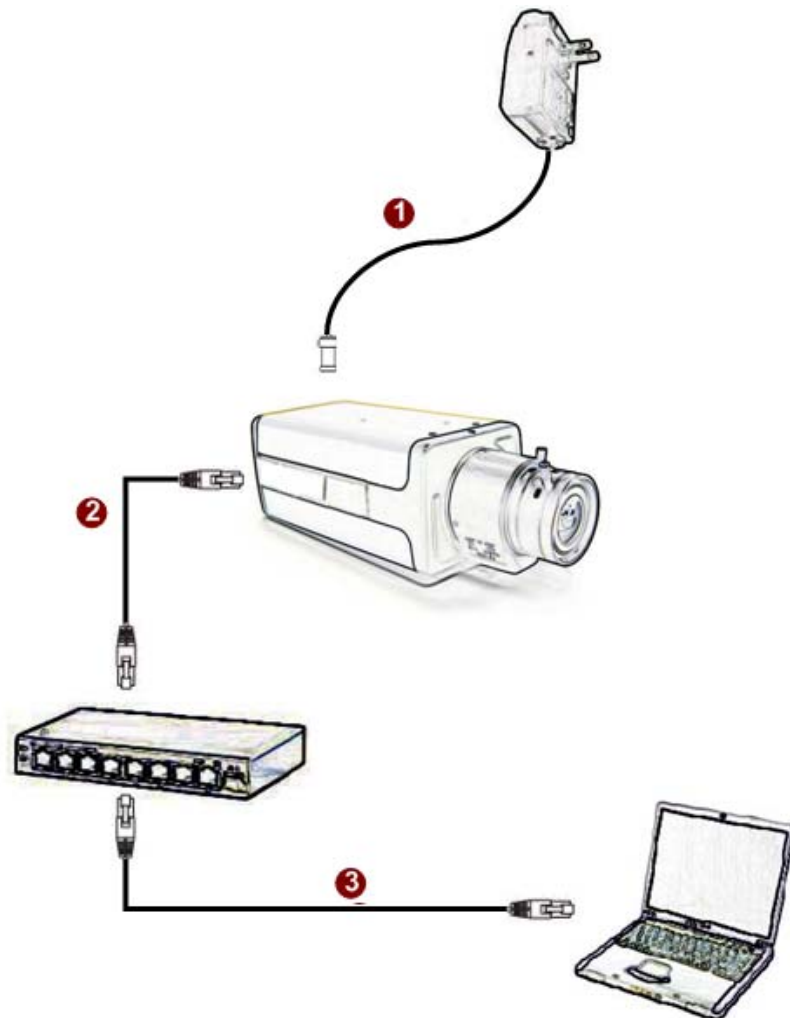

If you have a PoE(Power over Ethernet) supported switch or injector:

1. Connect your IP Box Camera to the Switch / Injector by CAT5 or CAT6 cables with RJ45 connector.
2. Connect your Switch / Injector to PC with another CAT5 / CAT6 network cable.

If your switch does not support PoE, and you are powering the camera with power adaptor::

1. Connect the power adaptor to IP Box Camera
2. Connect IP device's ethernet port to Network switch (via RJ45 connectors).
3. Connect a PC to the Ethernet switch (via RJ45 connectors)



**NOTE:** For more detailed explanations, we provide a support package that clarifies PoE related concepts for you. Please visit our web site and download the support document TS-00040.

# 1.6 Installation Procedure

Regarding Back focus adjustment, please download our support document [here](#) :

# 1.7 Product Specification

		TCM-5311	TCM-5312
Image	Device	SONY Progressive Scan 1.25M Pixel ExviewHAD CCD	
	Size	1/3 inch	
	Effective Pixels	1296(H) x 966 (V)	
	Horizontal Resolution	900 TVL	
Min. scene Illumination	Color	Color mode automatically switched to B/W mode (User defined)	
	B/W	0.05 Lux at F1.2 (30 IRE, SAGC)	
	IR Sensitivity	from 700nm to 1100nm	
	CDS Sensor	N/A	
Lens	Lens Mount	C/CS (with adaptor)	
Synchronization	Sync. System	Internal	
Day/Night functions	Mechanical IR Cut Filter	Yes	
Functions	Motion Detection	Yes (3 Windows)	
	Electronic shutter	2~1/500 up to 1/100,000 sec.	
	Fixed Shutter (Manual)	1/60 ~ 1/10,000 sec. (60Hz) 1/50 ~ 1/10,000 sec. (50Hz)	
	Flickerless	Auto On/Off	
	BLC	Auto On/Off	
	AGC	Automatic (User defined)	
	White Balance	Auto, Indoor1, Indoor2, Outdoor1, Outdoor2, Hold Current, Manual	
	S/N Ratio	S/N Ratio	Better than 50 dB
Video Compression	Compression	H.264/ MPEG-4 SP/ MJPEG simultaneous dual streams selectable	
	Picture Resolution	SXGA (1280x960) HD 720 (1280x720) VGA (640x480) QVGA (320x240) QQVGA (160x112)	
	Bit Rate	28K ~ 6M bps	
	Image Frame Rate	15 fps at SXGA; 30 fps at HD720; 30 fps at VGA; 30 fps at QVGA; 30 fps at QQQVGA	
Audio Input	Compression	8kHz, Mono, PCM	
	Audio Line Input	Unbalanced, 1.4Vp-p, 1Vrms, 3.5mm Phone Jack	
Audio Output	Compression	8kHz, Mono, PCM	
	Audio Line Output	Unbalanced, 1.4Vp-p, 1Vrms, 3.5mm Phone Jack	
External I/O	Reset Button	Factory Default	
	LED	System Status	
Network	Ethernet	Ethernet(10/100 Base-T), RJ-45 connector	
	Protocol	TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, IPv6	
Software	Web Browser	Microsoft Internet Explorer 6.0 or above	
	SDK	ACTi SDK-10000	
	Security	Password Protection: Configured by the Administrator	
Operating	Temperature	-10°C ~ 50°C (14°F ~ 122°F )	
Power	Power Requirement	PoE (IEEE 802.3af) with Class 3	AC 24 V±10%
	Power Consumption	6.72 W (DC 12 V) 7.68 W (PoE)	8.04 W (DC 12V) 6.24 VA (AC 24V)
Physical	Dimensions (WxHxD)	135.6mm x 82.6mm x 61.0mm (5.34" x 3.25" x 2.40")	
	Weight	505g (1.1 lb)	
Approvals	Certificate	CE, FCC	